

ESCORT

SHOTGUNS

DISASSEMBLY/REASSEMBLY INSTRUCTIONS ALL PUMP MODELS

NOTICE: NEVER handle, or work on a firearm unless you are ABSOLUTELY CERTAIN that it is UNLOADED!



5

Remove barrel and set aside.



6


Push slide forward along magazine tube and remove slide and bolt assembly.



7


Remove bolt by lifting up on rear of bolt and pushing forward. Then lift bolt up and off of slide assembly.

NOTE: The front of the bolt has a socket that **MUST** fit over a detent in the slide rail assembly. This fit is **CRITICAL** in reassembly of the bolt and slide assembly. See Step 8.

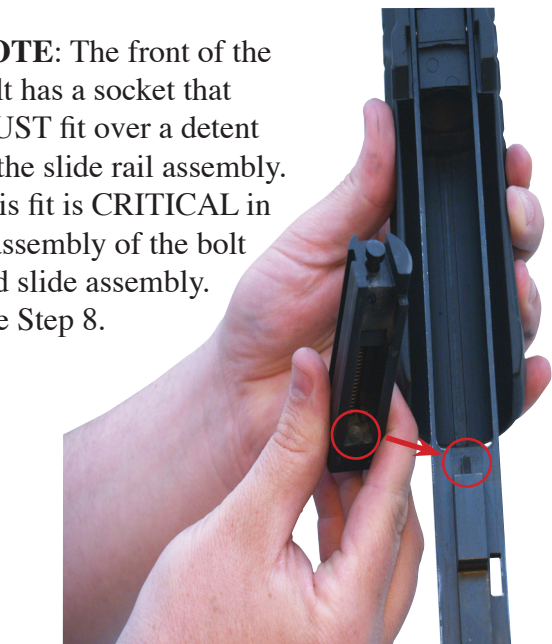

8

To reinstall bolt, tip front of bolt downward and slide back onto slide rails, making certain bolt socket engages slide rail detent.

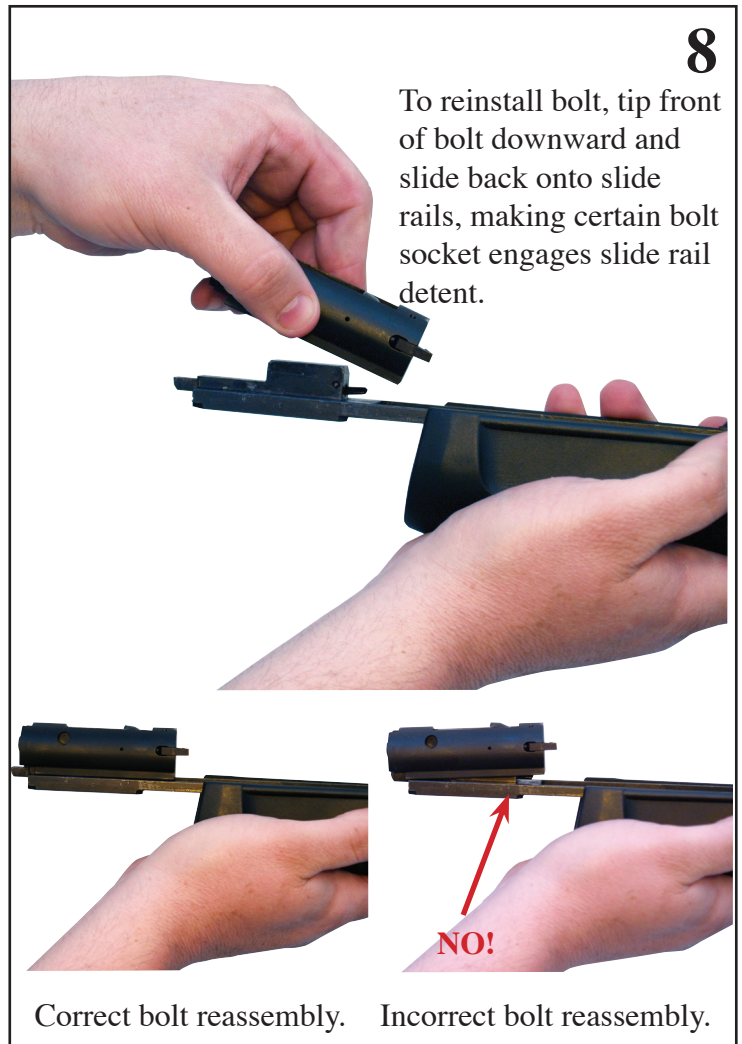

Correct bolt reassembly. Incorrect bolt reassembly.

Continue reassembling shotgun by following Steps 1 through 6 in reverse order.

LEGACY
SPORTS
INTERNATIONAL®
WWW.LEGACYSPORTS.COM
THE MOST TRUSTED NAME
IN THE SHOOTING INDUSTRY